

PC-LINKED SMART CARD READER

ACR39U-H1

CONVENIENT & RELIABLE

The ACR39U-H1 is a smart card reader with a unique design. Built with the “Bridge Desktop” casing, it allows for upright insertion of smart cards, making it convenient for user applications in network security and electronic payment system settings.

The reader supports ISO 7816 Class A, B, and C smart cards (5 V, 3 V, and 1.8 V), microprocessor cards with the T=0 and T=1 protocol, as well as an array of memory cards including the Secure Internet Protocol Router Network (SIPRNET) Card, the Department of Defense Common Access Card (CAC), and the Malaysian Identity Card (MyKad). Highly durable, the ACR39U-H1 can withstand up to 200,000 card insertion cycles.

Compliant with both PC/SC and CCID, the ACR39U-H1 is designed to be integrated into any computer-based environment as it is compatible with various operating systems such as Windows®, Linux® and macOS, and is able to run on mobile devices running on Android™ Versions 3.1 and later. EMV™ Level 1 (Contact) and People’s Bank of China (PBOC) certified, the ACR39U-H1 is without a doubt, the ideal smart card reader for your e-Banking and e-Payment application needs.



KEY FEATURES

- ✓ **Supports Various Types of Contact Cards**
 - ISO 7816 Class A, B and C (5 V, 3 V and 1.8 V)
 - Microprocessor Card (T=0, T=1)
 - Memory Card
 - MyKad Card
 - CAC, SIPRNET Smart Card
- ✓ **Reliable**
 - Compliant with International Regulations
 - Mean Time Between Failures (MTBF) up to 500k Hours
 - Card Insertion Cycles: 200k Times
 - Short Circuit Protection
- ✓ **Compatible**
 - Windows®, Linux®, macOS, Solaris™ and Android™

e-Government
e-Banking and e-Payment
e-Healthcare
Public Key Infrastructure
Network Security
Access Control
Loyalty Program

TECHNICAL SPECIFICATIONS

Contact Smart Card Interface

Number of Slot(s)	1 Full-Sized Card Slot
Supported Card Types	ISO 7816 Parts 1-4, Class A, B, C (5 V, 3 V, 1.8 V), Microprocessor Card (T=0, T=1), Memory Card, MyKad Card, CAC, SIPRNET Smart Cards
Supply Current	Max. 50 mA
Read/Write Speed	9.6 – 600 Kbps
Clock Frequency	4.80 MHz, Operates Up to 16MHz
Card Connector	6pin Contact
Card Insertion Cycles	Min. 200,000 Min. 300,000 (For Landing Connector)
PPS (Protocol and Parameters Selection)	Supported
Short Circuit Protection	Supported

Host Interface

Protocol	USB CCID
Connector Type	USB Type-A
USB Interface	USB 2.0 Full Speed (12Mbps) Compatible with USB 3.0
Supply Voltage	5 V
Cable Length	1.5 m (Non-Detachable)

Application Programming Interface

PC-Linked Mode	PC/SC
----------------	-------

Physical Characteristics

Dimensions	71.5mm (L) × 80.0mm (W) × 80.0mm (H)
Weight	174 g ± 5 g (For Cable)
Available Colour(s)	White

Peripherals

LED(s)	2 Single-Color (Green and Red)
--------	--------------------------------

Operating Conditions

Temperature	0 - 60°C
Humidity	Max. 90% (Non-Condensing)
MTBF	500,000 Hours
Power Source	USB Port

Certifications/ Compliances

Standards	USB CCID, PC/SC, EMV™ Level 1 (Contact), PBOC Level 1 (Contact), Microsoft® WHQL, TAA
Regulatory/ Environmental	CE, IEC/EN 62368, FCC, VCCI, KC, RoHS, REACH, WEEE, UKCA

OS Support


Supported OS	Windows®, Linux®, macOS, Solaris™, Android™
Plug and Play	Supported

Model/Part Number

Default	ACR39U-H1
---------	-----------

MECHANICAL SPECIFICATIONS

Note: All dimensions in mm

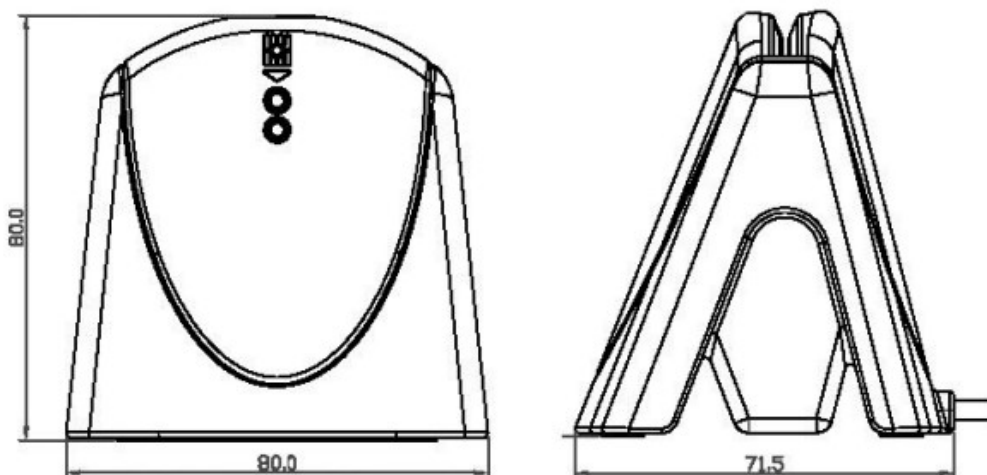

Android is a trademark of Google LLC.

EMV is a registered trademark or trademark of EMVCo LLC in the United States and other countries.

Linux® is the registered trademark of Linus Torvalds in the U.S. and other countries.

macOS is a trademark of Apple Inc., registered in the U.S. and other countries.

Microsoft® and Windows® are either registered trademarks or trademarks of the Microsoft Corporation in the United States and/or other countries.

Solaris is a registered trademark of Oracle and/or its affiliates in the United States and other countries.