




D=34 mm F08 Inlay/Label

This inlay meets with ISO14443A standard, operating frequency is 13.56MHz. Each inlay has a unique ID and stores user data. It is applied to equipment tracking, IT assets management, library management, dangerous goods management, etc.

Antenna Size	D34mm
Wet Inlay/Label Size	D37mm (customized)
Material	Coated Paper / PET / PP Paper / Fragile Paper
Working Temp	-40~+85°C
Storage Temp	-20~50°C
Storage Humidity	20%~90% RH
RFID Standard	ISO14443A
Chip Type	FM11RF08
Read Range	0 - 10 cm
Data Storage	> 10 years
Re-write	100000 times
Customization	Printing LOGO, Barcode, Serial number, Encoding, Designing, etc.
Package	Reel core inner dimension: 76.2mm / 3(in), Outside diameter < 220 mm / 8.7(in), 1000-5000pcs/roll, 4 rolls /carton
Application	IT asset Tracking Library management Document tracking management Dangerous goods management

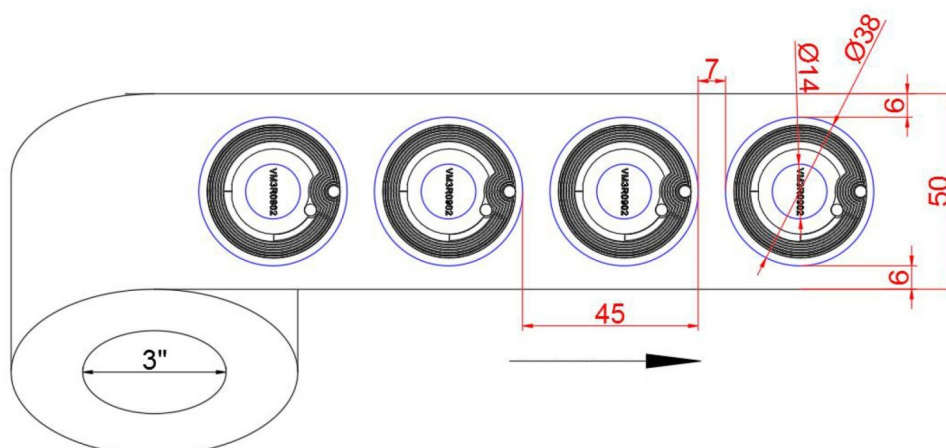


SCIVAS LIMITED

YOUR VISION, OUR FREQUENCY

RFID Tags & Smart Cards, Precision-Engineered for Global Markets.

www.scivas.com Tel: +86-20-87097510

Dimensions:

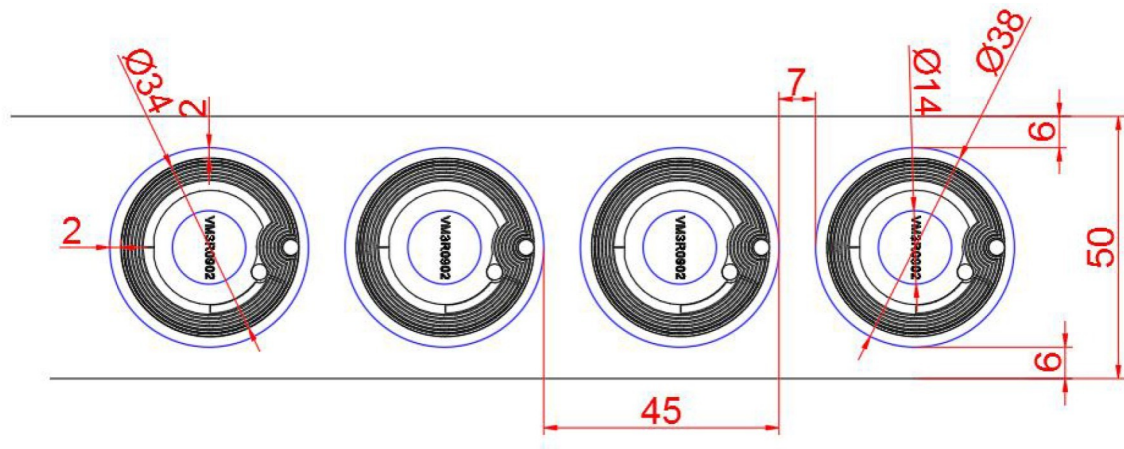

Application:

